


H794

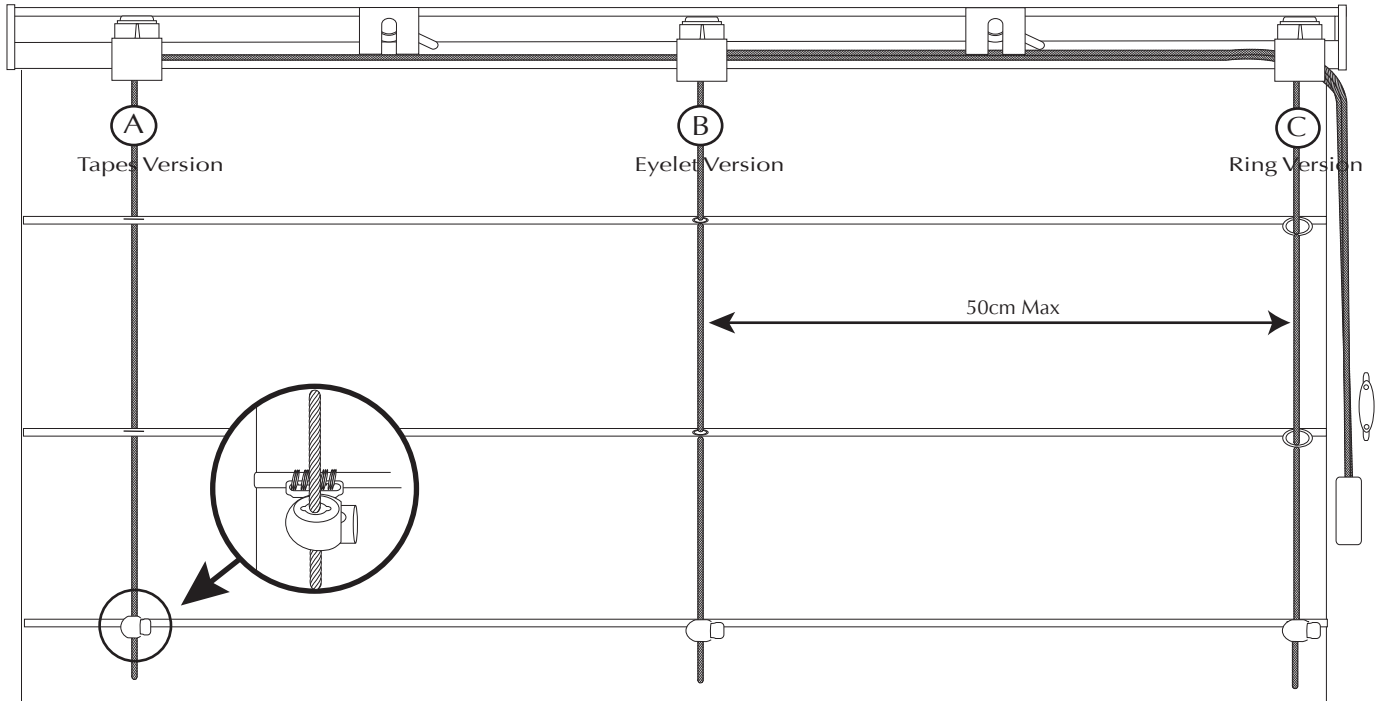

UK patent application number: 1416636.7

Cord Draw System

1

Secure the brackets in position on the wall/ceiling. The brackets supplied are suitable for both face fix and top fixing.

2

Sew the toggles onto the blind as shown. We recommend Güttermann A782 thread. Feed the cord through the toggle and adjust as required. Do not tie knots in the cord.

3

Slide the cord guide into the profile engaging the first step as shown above. Then push down to lock into place. Now feed the cord through the guides.

4

Feed the two primary cords through the holes in each section. If have more than two cords (max 6) use the two slots that can hold two cords in each. Finally snap the two halves together.

5

Lift the profile onto the brackets and lock by moving the lever from the vertical position to the horizontal position.

6

Fix the cleat firmly to the wall ensuring the blind cord is attached when the blind is raised.